

Beyondtech PureOptics ™ Optical Terminal Box

Order Code: BTOTB0411W

Also known as a rosette, is a device used in fiber optic networks to protect and house the terminations of fiber optic cables. OTB's are typically installed indoors, close to end users, and serve as the connection point between the main fiber optic network and individual devices.

FEATURES AND BENEFITS

- Provides a connection point for the main fiber optic cable coming from the service provider to branch out individual fiber optic cables going to different rooms or devices.
- Equipped with adapter ports, usually SC or LC connectors, to facilitate easy connection and disconnection of fiber optic cables.
- Designed to be compact and aesthetically pleasing for indoor placement. May be wall-mounted or placed on a tabletop depending on the model.
- Designed for simple installation by ISP or qualified technicians. Design minimizes clutter and allows for efficient use of space within a home or business.





SPECIFICATIONS

Applications:

Interior of Homes and Businesses, Office Buildings and Campuses, Indoor use recommended.

IN/OUT Ports:

2/2

Inlet/Outlet Caliber:

Drop - 3,0 mm

Max. Splice Capacity:

MAX: 05

Dimensions (H*W*D):

100 mm X 80 mm X 22 mm

Operating Temperature:


- 40°C + 65°C

Package Contents: Installation kit





Example: BTOTB0112010000W = Beyondtech | OTB | Model 01 | 1 X Standard | 2 X SC/APC - SC/APC - Simplex | None | None |

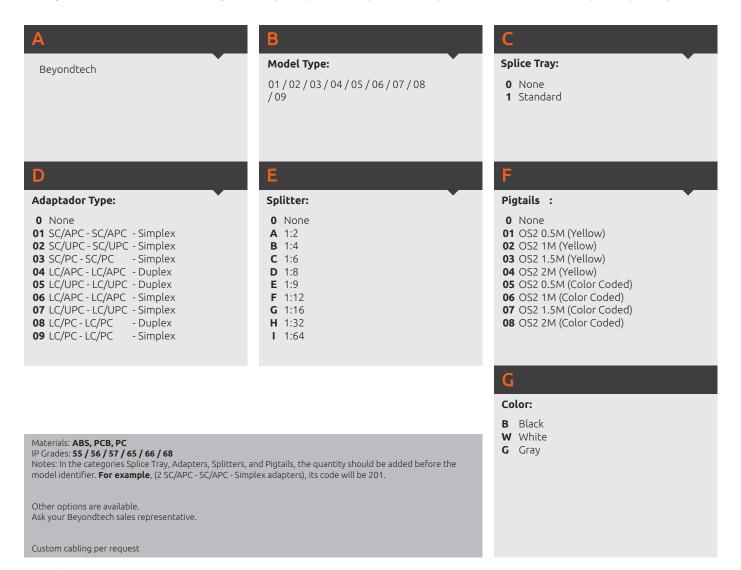



For more information on Beyondtech Premium Warranty, visit beyondtech.us/warranty



DISCLAIMER

This datasheet is from authorship and exclusive property of Beyondtech. His reproduction is banned in the integral or partially without mentioning his authorship, as well as the alteration of his content or context.

IMPORTANT NOTICE

All statements, technical information, and recommendations related to Beyondtech products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in Beyondtech current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of Beyondtech.









Order Code: BTOTB0411W **Type:** Optical Terminal Box

Application: Interior of Homes and Businesses, Office Buildings and Campuses, Indoor use recommended.

IN/OUT Ports: 2/2

Inlet/Outlet Caliber: Drop - 3,0 mm Max. Splice Capacity: MAX: 05

Dimensions (H*W*D): 100 mm X 80 mm X 22 mm

Operating Temperature: - 40 C + 65 C

WORLDWIDE CORPORATE HEADQUARTERS

Beyondtech INC Miami, FL, USA info@beyondtech.global +1 (305) 897.3507 Beyondtech EUROPE Madrid, ES info@beyondtech.es +34 (911) 233.074 Rediret UK LTD. London, UK info@rediret.com +44 (020) 3289.1190 Beyondtech LAC Caracas, VE. info@beyondtech.lat +34 638 67 26 03 For more information, visit our website www.beyondtech.global, contact us at customer@beyondtech.global or call +1 (844) 283.5266 (toll-free).

