

# Beyondtech PureGigabit ™ Fiber Patch Cables

**BTPSTUSTU-4DC-XMXP** 

Beyondtech's high-quality ST to ST laser-optimized Fiber Patch Cable 50/125µm OM4 Multimode fiber is specially designed for fast Ethernet, Fiber Channel, Gigabit Ethernet Speeds, data center, premises, educational, commercial, LAN, SAN, building backbone, riser and horizontal applications. It supports video, data and voice services.

## FEATURES AND BENEFITS

- Our OM4 fiber patch cords conform conforms with ITU-T G.651.1, TIA/EIA 492AAAD and IEC60793-2-10 A1a.3a standards and complies with all RoHS environmental specifications.
- Our OM4 cables have a 3500 MHz-km OFL bandwidth and a 2.8 dB/km maximum attenuation at 850 nm light sources. They have a 500 MHz-km OFL bandwidth and a 0.8 maximum attenuation at 1300 nm wavelength. And a 4700 EMB bandwidth at 850 nm light sources.
- This multimode patch cord operate at -20°C to +70°C and have a minimum installation bending radius of 5 cm and a minimum long term bending radius of 3 cm.
- Our OM4 LOMMF patch cords connects 10GBase-SR, 10GBase-LRM, SFP+ and QSFP+ transceivers for 10 gigabit network.



### **SPECIFICATIONS**

**Color Code:** Aqua

Bend Radius: Minimum / 5cm

Cable Jacket: 3.0mm LZSH

**Operating Temperature:** -4° to 158° F (-20° to +70° C)

**Core:** OM4 50/125µm

Jacket: Standard Zip Cord Duplex

**Termination:** Connector A (ST) / Connector B (ST)

### Features:

Connectors feature dust caps on the tips for protection. ST and ST duplex assemblies are attached with easy-removable clips.





## How to order products?



Example: BTPLCULCU0DC1M1P = Beyondtech | Patch Cables | LC | UPC | to LC | UPC | OS1 | Duplex | 3.0mm PVC | 1Meter | 1 Pack

A Beyondtech	<ul> <li>P Fiber Patch Cable</li> <li>C Fiber Connectors</li> <li>A Fiber Adapters</li> <li>AT Fibre Attenuator</li> <li>PI Fiber Pigtail</li> </ul>	C A Connector: SC/LC/ST/FC/MJ (MTRJ)
D A Polishing: P PC U UPC A APC	E B Connector: SC/LC/ST/FC MJ (MTRJ)	F B Polishing: P PC U UPC A APC
<ul> <li>G</li> <li>OS1 Single-mode 9/125μm</li> <li>OM1 Multi-mode 62.5/125μm</li> <li>OM2 Multi-mode 50/125μm</li> <li>OM3 Multi-mode 50/125μm 10Gb</li> <li>OM4 Multi-mode 50/125μm 100Gb</li> </ul>	H S Simplex D Duplex	<ul> <li>A 0.9mm LSZH</li> <li>B 2.0mm LSZH</li> <li>C 3.0mm LSZH</li> <li>D 0.9mm PVC</li> <li>E 2.0mm PVC</li> <li>F 3.0mm PVC</li> </ul>
<b>J</b> Length: Number X (M: Meters / FT: Feet)	<b>Pack:</b> Number X (P: Pack)	<ul> <li>E, F: In case of Fiber pigtail leave blank LSZH (Low Smoke Zero Halogen)</li> <li>Other options are available. Ask your Beyondtech sales representative.</li> <li>1 Jacket Type (OFNG)</li> <li>2 Connector Type: E2000, MTRJ, Female/Male, MTP</li> <li>3 Custom cabling per request</li> </ul>



For more information on Beyondtech Premium Warranty, visit **beyondtech.us/warranty** 




### DISCLAIMER

This datasheet is from authorship and exclusive property of Beyondtech. His reproduction is banned in the integral or partially without mentioning his authorship, as well as the alteration of his content or context.

#### **IMPORTANT NOTICE**

All statements, technical information, and recommendations related to Beyondtech products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in Beyondtech current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of Beyondtech.



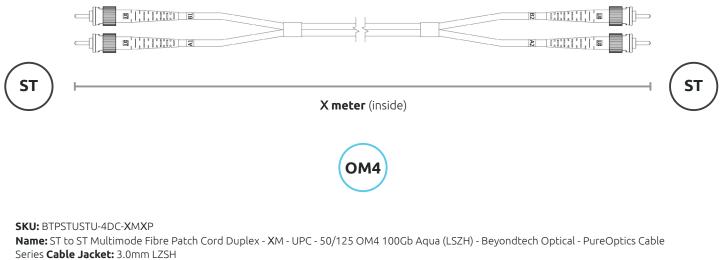

Length (ft.): X Length (m): X Connector type A: ST Connector type B: ST Color: Aqua Core: OM4 50/125µm

### WORLDWIDE CORPORATE HEADQUARTERS

Rediret UK LTD. London UK. info@rediret.com +44 (020) 3289.1190 Beyondtech Europe Madrid, ES info@beyondtech.es +34 (747) 869.449 Beyondtech Americas Miami, FL, USA info@beyondtech.global +1 (305) 897.3507 For more information, visit our website www.beyondtech.global, contact us at customer@beyondtech.global or call +1 (844) 283.5266 (toll-free).

©2017 Beyondtech, Inc. All rights reserved. Beyondtech® is a trademark of Beyondtech, Inc. | www.beyondtech.global